


Round safety overflows TOPWET TWPP and TWPP MINI

BASIC INFORMATION

purpose	drainage of flat roofs, terraces and balconies
material	polyamide PA6/PVC – UV Stabil
Integrated connection sleeve	BIT – modified bitumen strip SBS, PVC – mPVC based foil, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PE – polyethylene foil, STE – a sleeve for connecting of waterproofing screed
colour	white
certification	EN 1253-2:2015 - Gullies for buildings - Part 2: Roof drains and floor gullies without trap
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

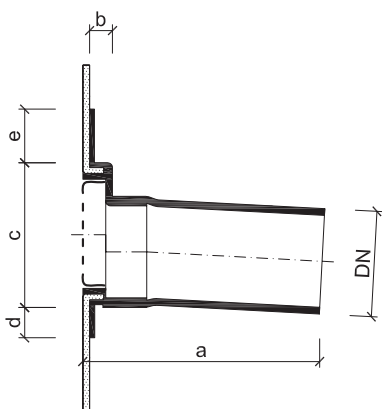

Round safety overflows

Type	DN	Dimensions [mm]				
		a*	b	c	d	e
TWPP 50	50	600	20	56	30	97
TWPP 75	70	600	20	81	30	84
TWPP 110	100	600	20	116	30	67
TWPP 125	125	600	20	131	30	59
TWPP MINI	40	200	40	46	2	57

* upon order it is possible to extend up to 2,000 mm